
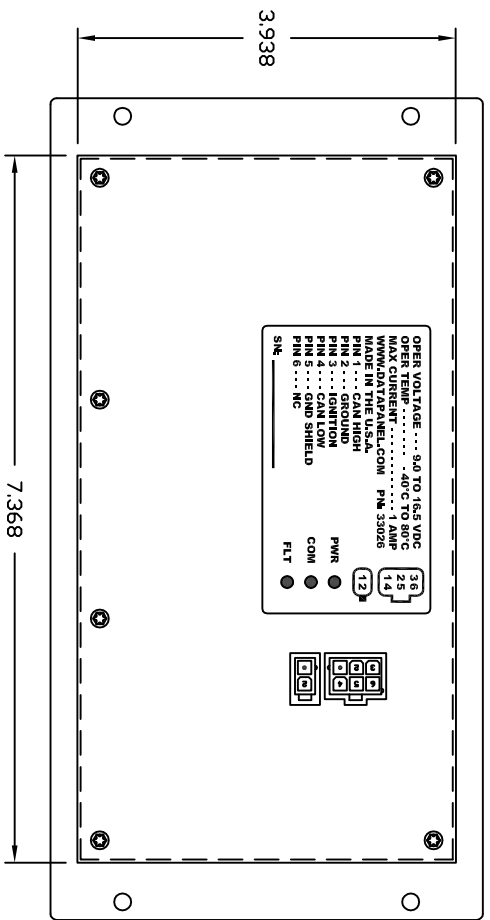
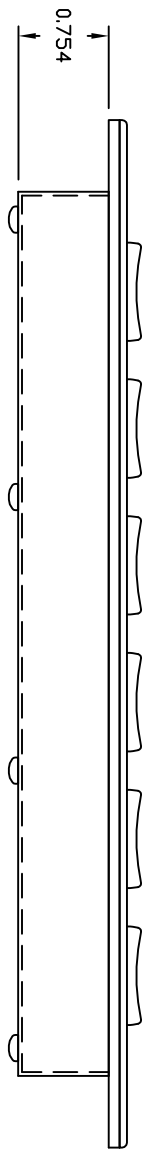


DATE	SYM	REVISION RECORD	BY:	DCN
SEP 25 18	A	RELEASE TO PRODUCTION	SCS	ES98
AUG 27 19	B	REVISED PART NUMBER	SCS	F004

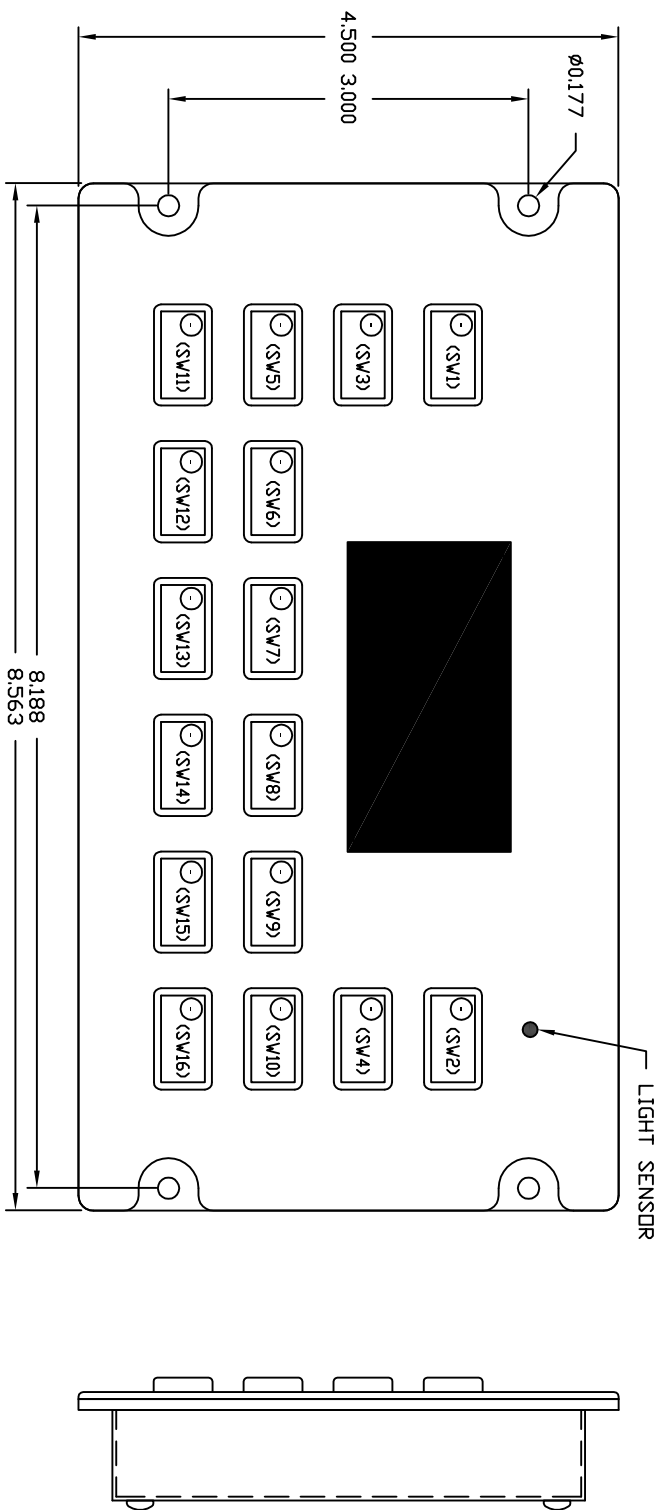

OPER VOLTAGE ... 9.0 TO 16.5 VDC
 OPER TEMPERATURE ... -40°C TO 80°C
 MADE IN THE U.S.A.
 WWW.DATAPANEL.COM P.N. 33026
 PIN 1 ... CAN HIGH
 PIN 2 ... CAN LOW
 PIN 3 ... IGNITION
 PIN 4 ... CAN LOW
 PIN 5 ... GND SHIELD
 SN: _____

- NOTES:
 1. SEE 33026-103-100 FDR ASSEMBLY INSTRUCTIONS
 2. CONNECTOR IS MOLEX 39-29-6068 [105-7603-1X10E2]
 MATES WITH RECEPTACLE 39-00-0186 [114-046]

DATA PANEL CORP.

CUSTOMER: XXX

MATL: SEE NOTES SIZE: A SCALE: NTS DRAWN BY: SCS

FINISH: SEE NOTES APP. BY:

TITLES: 16 POS MCDPX SWITCH PANEL W/DISPLAY

DATE: SEP 24 18 DRAWING NUMBER: 33026-3-000 REV. B

TOLERANCES: DECIMAL ± .010 FRACTIONAL ± 1/32 ANGULAR ± 1°

EXCEPT WHERE NOTED

DATA PANEL CORPORATION CLAIMS ALL PROPRIETARY RIGHTS TO THIS DRAWING AND THE INFORMATION IT CONTAINS. THIS MATERIAL IS CONFIDENTIAL. DISCLOSURE, REPRODUCTION, AND MANUFACTURING IS STRICTLY PROHIBITED WITHOUT THE EXPRESS WRITTEN PERMISSION OF DATA PANEL CORPORATION. ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.