
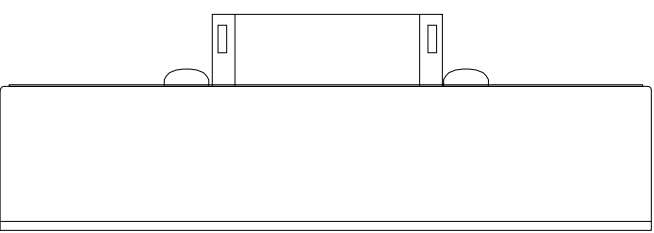



DATE	SYM	REVISION RECORD	BY:	DCN
JUN 26 13	A	RELEASE TO PRODUCTION	SCS	D205
JAN 28 19	B	UPDATE LOGD	SCS	E731

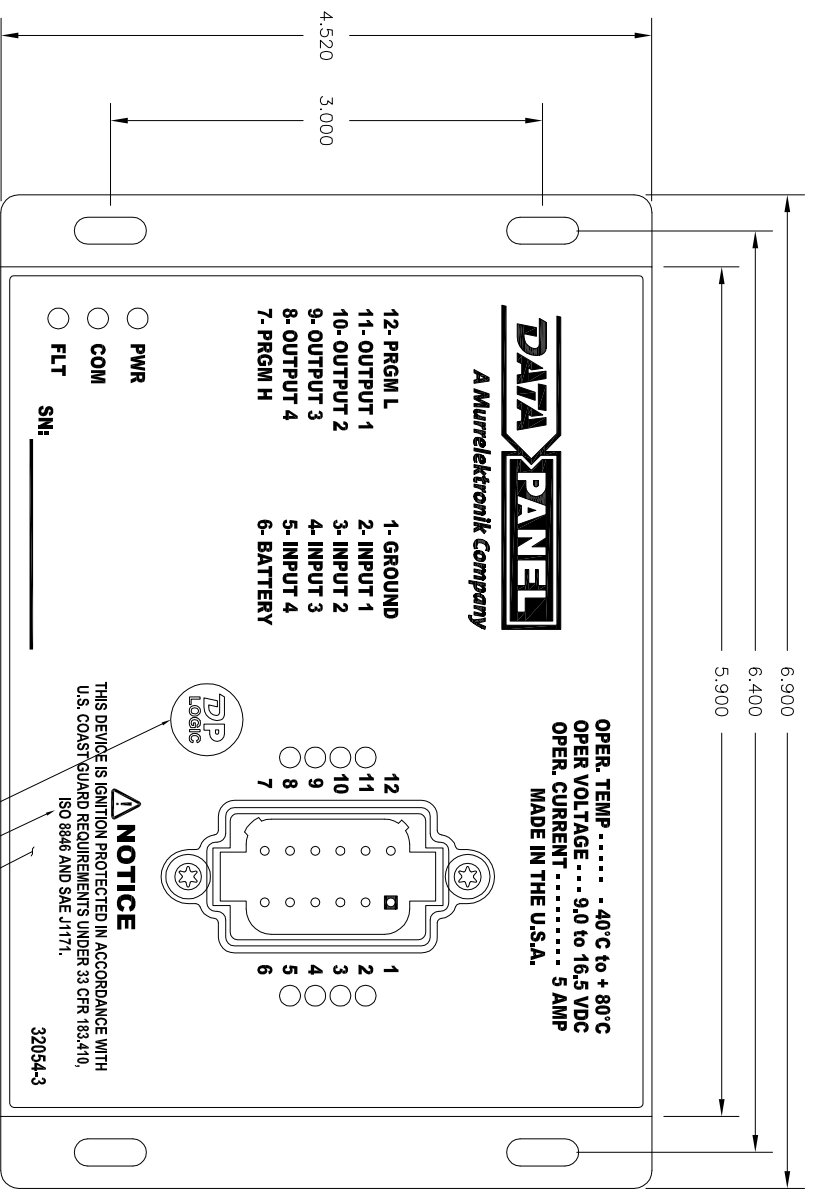

PIN	DESCRIPTION	RATING
1	GROUND VDC BATTERY RETURN	13 AMP
2	POS DIGITAL INPUT 1	.01 AMP @ +12.5 VDC
3	POS DIGITAL INPUT 2	.01 AMP @ +12.5 VDC
4	POS DIGITAL INPUT 3	.01 AMP @ +12.5 VDC
5	POS DIGITAL INPUT 4	.01 AMP @ +12.5 VDC
6	+12VDC BATTERY	13 AMP @ +12.5 VDC
7	PRGM COM H	NC
8	DIGITAL OUTPUT 4	5 AMP @ +12.5 VDC
9	DIGITAL OUTPUT 3	5 AMP @ +12.5 VDC
10	DIGITAL OUTPUT 2	5 AMP @ +12.5 VDC
11	DIGITAL OUTPUT 1	5 AMP @ +12.5 VDC
12	PRGM COM L	NC

NOTE:

- SEE 32054-102 FOR ASSEMBLY INSTRUCTIONS.
- DEUTSCH CONNECTOR DT15-12PA (134-1300-01612) MATES WITH DT06-12SA (134-1000-01612)
- USE DEUTSCH SEALING PLUG 114017 (134-9997-07000) ON ALL UNUSED PINS



DATA PANEL CORPORATION CLAIMS ALL PROPRIETARY RIGHTS TO THIS DRAWING AND THE INFORMATION IT CONTAINS. THIS MATERIAL IS CONFIDENTIAL. DISCLOSURE, REPRODUCTION, AND MANUFACTURING IS STRICTLY PROHIBITED WITHOUT THE EXPRESS WRITTEN PERMISSION OF DATA PANEL CORPORATION. ALL RIGHTS OF DESIGN OR INVENTION ARE RESERVED.

TOLERANCES
EXCEPT NOTED

DECIMAL	± .010
FRACTIONAL	± 1/32
ANGULAR	± 1°

DATA PANEL CORP.			
CUSTOMER: X			
MATL:	SEE NOTE	SIZE	SCALE
FINISH:	SEE NOTE	A	NTS
TITLE	VDM-0404		DRAWING NUMBER
DATE	APR 12 13	32054-3	REV. B